


Aladdin BI-FLEX1

About BI-FLEX1

The BI-FLEX1 is the first flexible BI-Color LED panel for professional use in television, movie and photographic production with an outstanding light quality and a CRI and TLCI over 98. The BI-FLEX1 is the cinematographer's choice for a small, lightweight and powerful lighting tool for many applications like: portable interview light or to hide in narrow spaces like elevators, cars or even inside objects for product photography.

The BI-FLEX1 runs from main power supply or battery. The BI-FLEX1 comes with a dimmer and a mount for 16mm studs, to mount it onto your stands or clamps and it has on each corner a velcro enabling you to put it where ever you like, for instance to upgrade your old halogen softbox to LED. The BI-FLEX1 is a flexible panel light 30x30cm and less than 5mm thick.

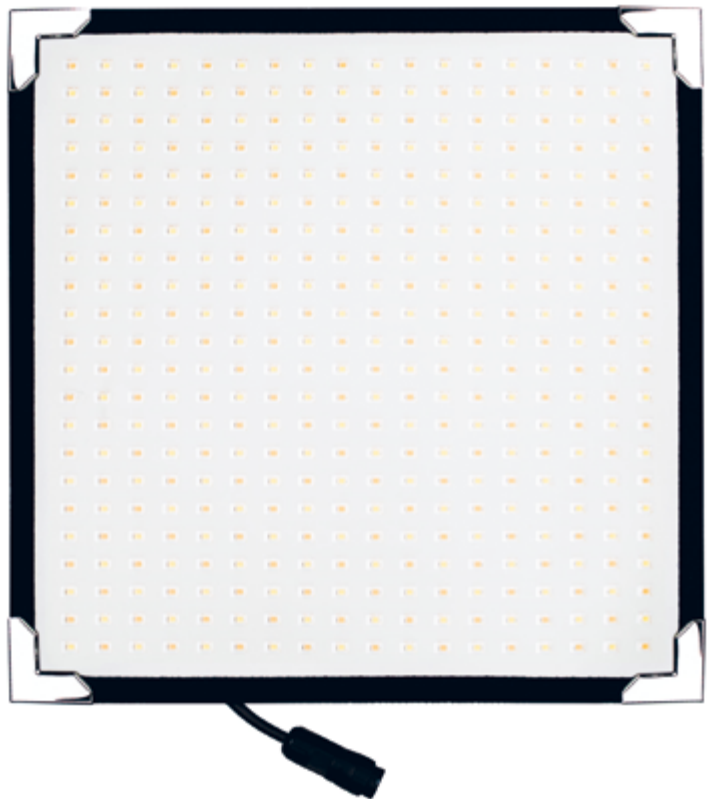

In the box

- | |
|---------------------------|
| 1x BI-FLEX1 |
| 1x Dimmer |
| 1x Stand-Mount |
| 1x Power supply 100V-240V |
| 1x Extension cable |
| 1x Diffusor |



AMS-fl50Bi Kit

Specifications

Light Source	Super High CRI Power LED's (50W)
CRI	CRI 98 / TLCI 98
Beam Angle	140°
Dimmer	Dimming: (5%–100%)
Cooling	passive cooling
Dimension	300 x 300 x 5 mm
Weight	309 g
Input AC/DC	12V to 15 Volt Or 90-240V

Photometrics

Aladdin BI-FLEX1 | 50W

	60cm/2ft	1m/3ft	2m/6ft	3m/9ft	CRI
Daylight 6000K	4200lux	1600lux	450lux	210lux	98
Bi-Color 4200K	4600lux	1700lux	500lux	230lux	97
Tungsten 3000K	3400lux	1200lux	340lux	170lux	97



AMS-FL50BI1 CASE



AMS-FL50BI3KITCASE



AMS-FL50BI GM



AMS-FL50BI VM



AMS-FL50BI EXCA5M



AMS-FL50BI MH



AMS-FL50BI DTAB-S



AMS-FL50BIGRID



AMS-FL50POUCH1



AMS-FLBMPOLE



AMS-FL50BI SBX